




# TOYANA Bearings Brazil Ltd.

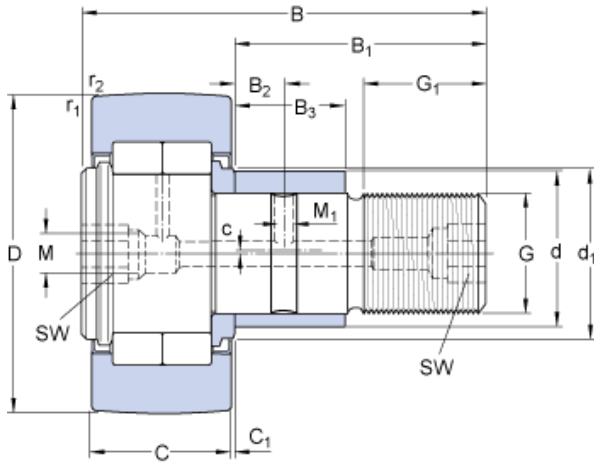

## 28 mm x 72 mm x 80 mm SKF NUKRE 72 A Rolamentos cilíndricos

Bearing No. NUKRE 72 A

NUKRE 72 A Bearing 2D drawings and 3D CAD models

Size	28x72x80 mm
Bore Diameter	28 mm
Outer Diameter	72 mm
Width	80 mm
D	72 mm
d	28 mm
B	80 mm
C	28 mm
B <sub>1</sub>	49.5 mm
B <sub>2</sub>	11 mm
B <sub>3</sub>	22 mm
C <sub>1</sub>	1.3 mm
d <sub>1</sub>	44 mm
G	M 24x1.5
G <sub>1</sub>	25 mm
M	8 mm
M <sub>1</sub>	4 mm
SW	14 mm
c	1 mm
r <sub>1,2</sub> - min.	1.1 mm
Basic dynamic load rating - C	45.7 kN
Basic static load rating - C <sub>0</sub>	58.5 kN
Fatigue load limit - P <sub>u</sub>	7.1 kN



## TOYANA Bearings Brazil Ltd.

Maximum dynamic radial loads - $F_r$	34.5 kN
Maximum static radial loads - $F_{0r}$	50 kN
Limiting speed	2000 r/min
Mass support roller	1.05 kg
Recommended tightening torque	220 N · m
Grease fitting	NIP A3x9.5
Hexagonal nut	M 24x1.5
Category	Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	1.117
EAN	7316570774160
Product Group	B04144
$B_1$	49.5 mm
$B_2$	11 mm
$B_3$	22 mm
$C_1$	1.3 mm
$d_1$	44 mm
$G_1$	25 mm
$M_1$	4 mm
$r_{1,2}$ min.	1.1 mm
Basic dynamic load rating C	45.7 kN
Basic static load rating $C_0$	58.5 kN
Fatigue load limit $P_u$	7.1 kN
Maximum dynamic radial loads $F_r$ max.	34.5 kN
Maximum static radial loads $F_{0r}$ max.	50 kN
Mass cam follower	1.05 kg



# TOYANA Bearings Brazil Ltd.

Lubrication adapter
---------------------

AP 14
-------